


Tramex PRFV

Suministro e instalación

Medidas estándar de tramex abierto de PRFV

Espesor (mm)	Ancho (mm)	Largo (mm)	Peso (kg/m ²)	Malla
15	1220	3660	5	38x38
25	1000	2000	11	38x38
25	1000	3000	11	38x38
25	1000	4000	11	38x38
25	1220	3660	11	38x38
30	1000	2000	15	38x38
30	1000	3000	15	38x38
30	1000	4000	15	38x38
30	1220	3660	15	38x38
38	1000	2000	18	38x38
38	1000	3000	18	38x38
38	1000	4038	18	38x38
38	1220	3660	18	38x38
50	1220	3660	19,5	50x50


Diseño

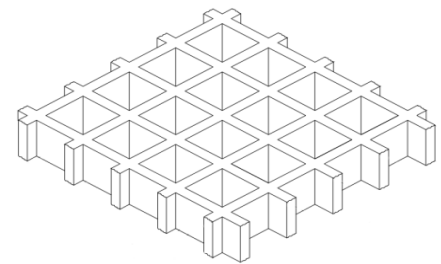

Medidas estándar de tramex ciego de PRFV

Espesor (mm)	Ancho (mm)	Largo (mm)	Peso (kg/m ²)	Malla
20	1220	3660	15	38x38
28	1000	2000	20	38x38
28	1000	4000	20	38x38
28	1220	3660	20	38x38
33	1000	2000	23	38x38
33	1000	4000	23	38x38
33	1220	3660	23	38x38
42	1000	2000	25	38x38
42	1000	4000	25	38x38
42	1220	3660	25	38x38
53	1220	3660	27,5	50x50

Diseño

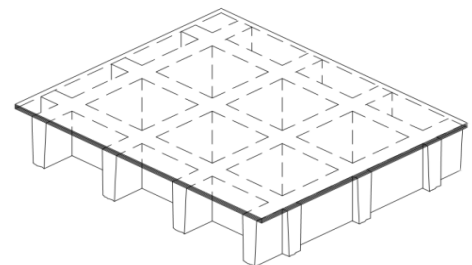

*Otras medidas y espesores consultar

www.tramexPRFV.com

info@tramexprfv.com | Tef./Fax.: 986 79 41 08 | Movil.: 651 72 77 87